

Permanent ultrasonic water flow meter

FLUXUS® WD Series

The solution for water suppliers

Drift-free, accurate, cost-efficient

Very low installation costs
and zero pipe interference

Extremely accurate down to flow
velocities as low as 0.01 m/s

No zero calibration needed and
permanently drift-free

Permanent coupling pads

IP68 transducers

Transducers can
be permanently buried
(no chamber required)

FLEXIM
when measuring matters





FLUXUS® WD Series

Drift-free measurements



There is no method of zero drift correction for our instruments – because they just don't drift. This also applies to the WD Series that is **installed without zero calibration** and **remains drift-free, permanently**. FLEXIM is the only company that accomplishes this, thanks to its unique combination of matched piezo-transducers and advanced factory calibration.


Reliable and accurate data

The WD Series belongs to the most reliable and accurate ultrasonic clamp-on systems. Furthermore, it **measures flow rates as low as 0.01 m/s**. The inaccuracy of other meter technologies can increase so dramatically in the low flow range, that they are unsuitable for monitoring minimum night flows. But for water suppliers the **precise monitoring of minimum night flows** is an essential part of their leakage detection activities – and the WD Series is the ideal tool for this task.

Low installation costs

When creating a new flow measurement point within a water network the main costs are not incurred by the instrument but by the installation work (supply interruption, pipe cutting, pipe flushing, etc.). These costs are significantly reduced using the **clamp-on technology** of the WD Series that does not require any work that affects the integrity of the pipe. This enables a **very simple and cost-effective** installation of further flow measurement points within an existing water supply network.

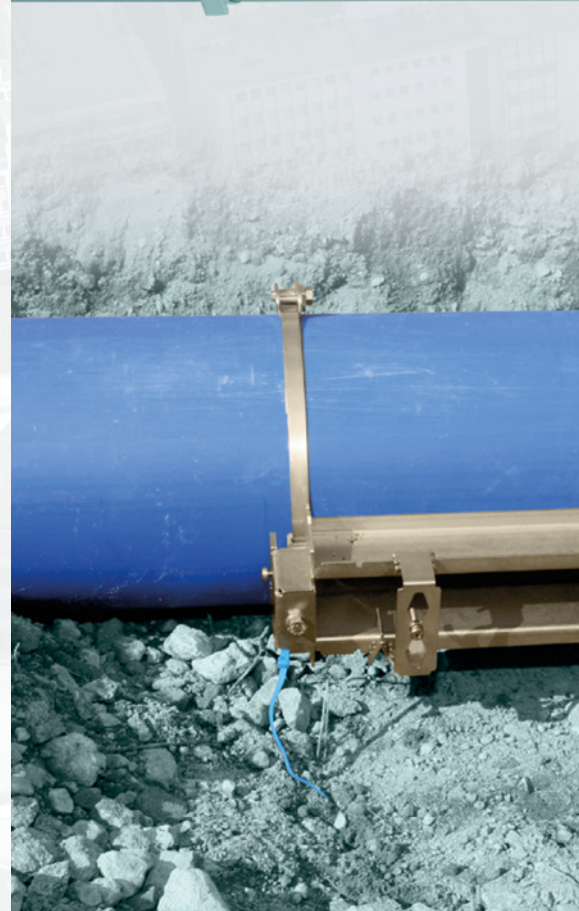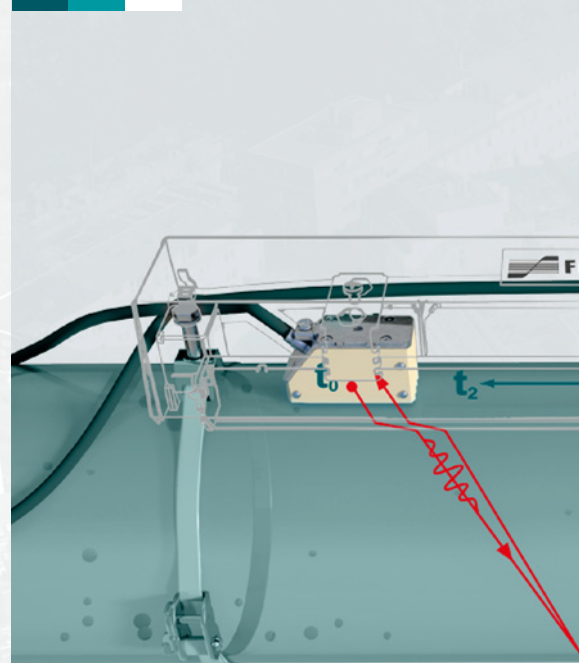

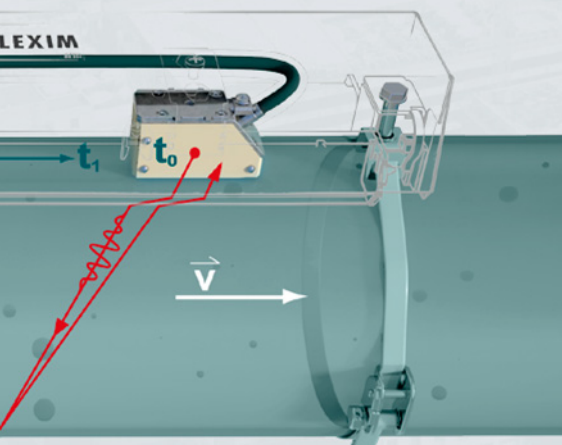

The solution for water suppliers

Built to last

FLEXIM supplies the WD Series with the **most robust mounting system** on the market. The transducers are fixed to the pipe with broad stainless steel straps and secured in robust stainless steel housings. The transducers themselves have **IP68 protection** and reinforced transducer cables. A further unique feature of FLEXIM is that the transducers are connected with **permanent coupling pads, instead of coupling gel** that can deteriorate or be washed away. All this ensures the durability of the system and makes it **suitable for both installations in chambers and buried installations.**

Works on difficult pipes

The WD Series is available with three transducer types and is suitable for inner diameters ranging from 50...6500 mm. The strong signal output and noise suppression technology make it possible to **use the WD Series on all pipe materials**, even on such challenging ones as fiber-reinforced plastic (FRP) pipes. The **outstanding performance** of FLEXIM is shown by thousands of references worldwide. Contact your local FLEXIM support office for more details.



FLEXIM

More than 25 years of experience
in non-invasive ultrasonic flow measurement



Product variant:	WD100	WD200
For pipe size (ID):	50 mm ... 100 mm	100 mm ... 200 mm
For pipe size (OD):	2 inch - 4 inch	4 inch - 8 inch
Pipe material:	All	
Media:	Water	
Flow velocity	0.01...25 m/s	
Accuracy:	±1.5 % of reading ±0.01 m/s	
Repeatability:	0.25 % of reading ±0.01 m/s	
Protection degree:	Transducer: IP68, Transmitter: IP66	
Number of flow measuring channels:	1	
Communication options:	Modbus, M-Bus, BACnet, RS485	
Data logger:	> 100.000 values	
Outputs:	1x Current, 2x Binary	



Product variant:	WD400	WD1200	WD6500
For pipe size (ID):	200 mm ... 400 mm	400 mm ... 1200 mm	1200 ... 6500 mm
For pipe size (OD):	8 inch - 16 inch	16 inch - 48 inch	48 inch - 260 inch
Pipe material:	All		
Media:	Water		
Flow velocity	0.01...25 m/s		
Accuracy:	±1.2 % of reading ±0.01 m/s		
Repeatability:	0.15 % of reading ±0.01 m/s		
Protection degree:	Transducer: IP68, Transmitter: IP66		
Number of flow measuring channels:	1 (optionally 2)		
Communication options:	Modbus, Foundation Fieldbus, Profibus PA, BACnet, RS485		
Data logger:	max. 800,000 values		
Outputs:	1x Current, 2x Binary		

FLEXIM GmbH

Berlin, Germany
Phone: +49 30 93 66 76 60
info@flexim.de

FLEXIM Austria GmbH

Olbendorf, Austria
Phone: +43 33 26 529 81
office@flexim.at

FLEXIM Instruments Benelux B.V.

Berkel en Rodenrijs, Netherlands
Phone: +31 10 24 92 333
benelux@flexim.com

FLEXIM France

Strasbourg, France
Phone: +33 3 88 27 78 02
info@flexim.fr

FLEXIM Instruments UK Ltd.

Northwich, UK
Phone: +44 1606 781 420
sales@flexim.co.uk

FLEXIM Instruments Asia Pte Ltd.

Singapore, Singapore
Phone: +65 67 94 53 25
salessg@flexim.com

FLEXIM Instruments China

Shanghai, China
Phone: +86 21 64 95 75 20
shanghai@flexim.com

FLEXIM S.A.

Santiago de Chile, Chile
Phone: +56 22 32 03 62 80
info@flexim.cl

FLEXIM AMERICAS Corporation

New York, USA
Phone: +1 63 14 92 23 00
usinfo@flexim.com

FLEXIM Service and Support Center South America

Esco Argentina S.A., Buenos Aires
Phone: +54 11 49 20 71 00
flexim@escoarg.com.ar
www.escoarg.com.ar

www.flexim.com

