

Steam ultrasonic flowmeter for permanent installation

Transmitter for permanent outdoor wall or pipe mounting

Features

- Exact and highly reliable measurement of saturated and superheated steam for temperatures up to max. 180 °C by means of the clamp-on principle
- Physical quantities volumetric flow rate and mass flow rate available in a transmitter without additional steam calculator
- Installation and start-up do not require any pipe work and are carried out without any process interruptions and cooling down of the steam system
- Non-invasive, wear-free and pressure constant measurement
- Maintenance-free acoustic coupling using permanent coupling foil
- High measurement accuracy even at very low as well as high flow rates and independent of the flow direction (bidirectional)
- Automatic loading of calibration data and transducer recognition
- Bidirectional communication and support of common bus technologies (Modbus, Profibus PA, Foundation Fieldbus, BACnet)
- Advanced self-diagnosis and possibilities for event-based triggering of data recording for the supervision and control of critical processes
- Transmitter and transducers are separately calibrated (traceable to national standards)
- The measurement is zero point stable and drift free

Applications

- Food and beverage industry
- Pharmaceutical industry
- Chemical industry
- Manufacturing industries



FLUXUS G721ST-****A



FLUXUS G721ST-****S




Variofix L

Function	3
Measurement principle	3
Calculation of volumetric flow rate	3
Calculation of mass flow	4
Number of sound paths	4
Typical measurement setup	5
Transmitter	6
Technical data	6
saturated steam pressure curve	7
Dimensions	8
2" pipe mounting kit	9
Terminal assignment	10
Transducers	11
Transducer selection	11
Technical data	12
Transducer mounting fixture	13
Coupling materials for transducers	14
Damping coat	15
Connection systems	16
Junction box	17
Technical data	17
Dimensions	17
2" pipe mounting kit	18
Clamp-on temperature probe (optional)	19
Technical data	19
Fixation	19
Junction box	20

Function

Measurement principle


The transducers are mounted on the pipe which is completely filled with the fluid. The ultrasonic signals are emitted alternately by a transducer and received by the other. The physical quantities are determined from the transit times of the ultrasonic signals.

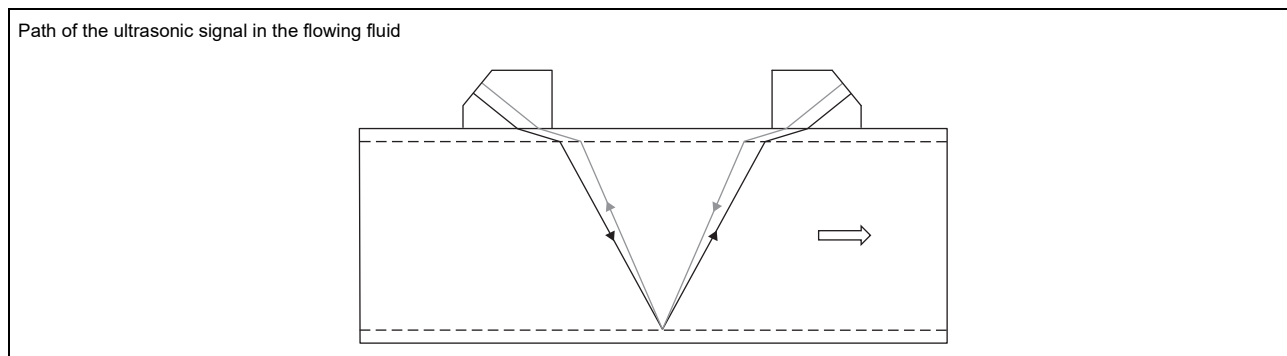

As the fluid where the ultrasound propagates is flowing, the transit time of the ultrasonic signal in flow direction is shorter than the one against the flow direction.

The transit time difference Δt is measured and allows the flowmeter to determine the average flow velocity along the propagation path of the ultrasonic signals. A flow profile correction is then performed in order to obtain the area averaged flow velocity, which is proportional to the volumetric flow rate.

The integrated microprocessors control the entire measuring cycle. The received ultrasonic signals are checked for measurement usability and evaluated for their reliability. Noise signals are eliminated.

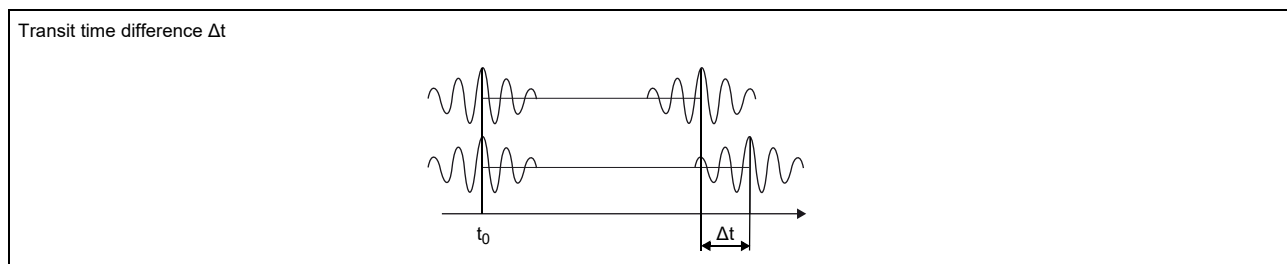

Calculation of volumetric flow rate

$$\dot{V} = k_{Re} \cdot A \cdot k_a \cdot \frac{\Delta t}{2 \cdot t_y}$$

where

- \dot{V} - volumetric flow rate
- k_{Re} - fluid mechanics calibration factor
- A - cross-sectional pipe area
- k_a - acoustical calibration factor
- Δt - transit time difference
- t_y - average of transit times in the fluid

Calculation of mass flow

The mass flow is calculated on the base of operating density and volume flow:

$$\dot{m} = \rho \cdot \dot{V}$$

The operating density of the fluid is calculated as the function of pressure and temperature of the fluid:

$$\rho = f(p, T)$$

where

- ρ - operating density
- p - fluid pressure
- T - fluid temperature
- \dot{m} - mass flow rate
- \dot{V} - volumetric flow rate

Number of sound paths

The number of sound paths is the number of transits of the ultrasonic signal through the fluid in the pipe. Depending on the number of sound paths, the following methods of installation exist:

• **reflection arrangement**


The number of sound paths is even. The transducers are mounted on the same side of the pipe. Correct positioning of the transducers is easier.

• **diagonal arrangement**

The number of sound paths is odd. The transducers are mounted on opposite sides of the pipe. In the case of a high signal attenuation by the fluid, pipe and coatings, diagonal arrangement with 1 sound path will be used.


The preferred method of installation depends on the application. While increasing the number of sound paths increases the accuracy of the measurement, signal attenuation increases as well. The optimum number of sound paths for the parameters of the application will be determined automatically by the transmitter.

As the transducers can be mounted with the transducer mounting fixture in reflection arrangement or diagonal arrangement, the number of sound paths can be adjusted optimally for the application.

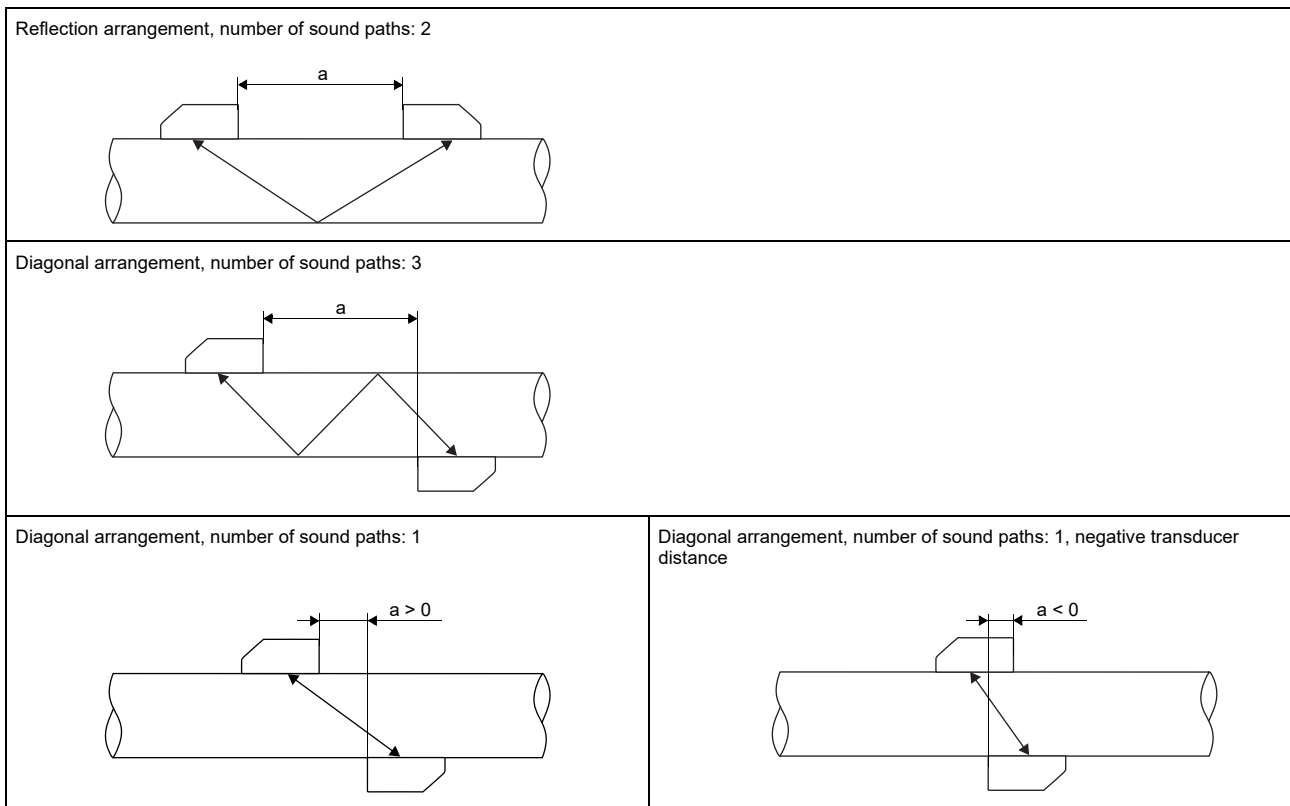



a - transducer distance

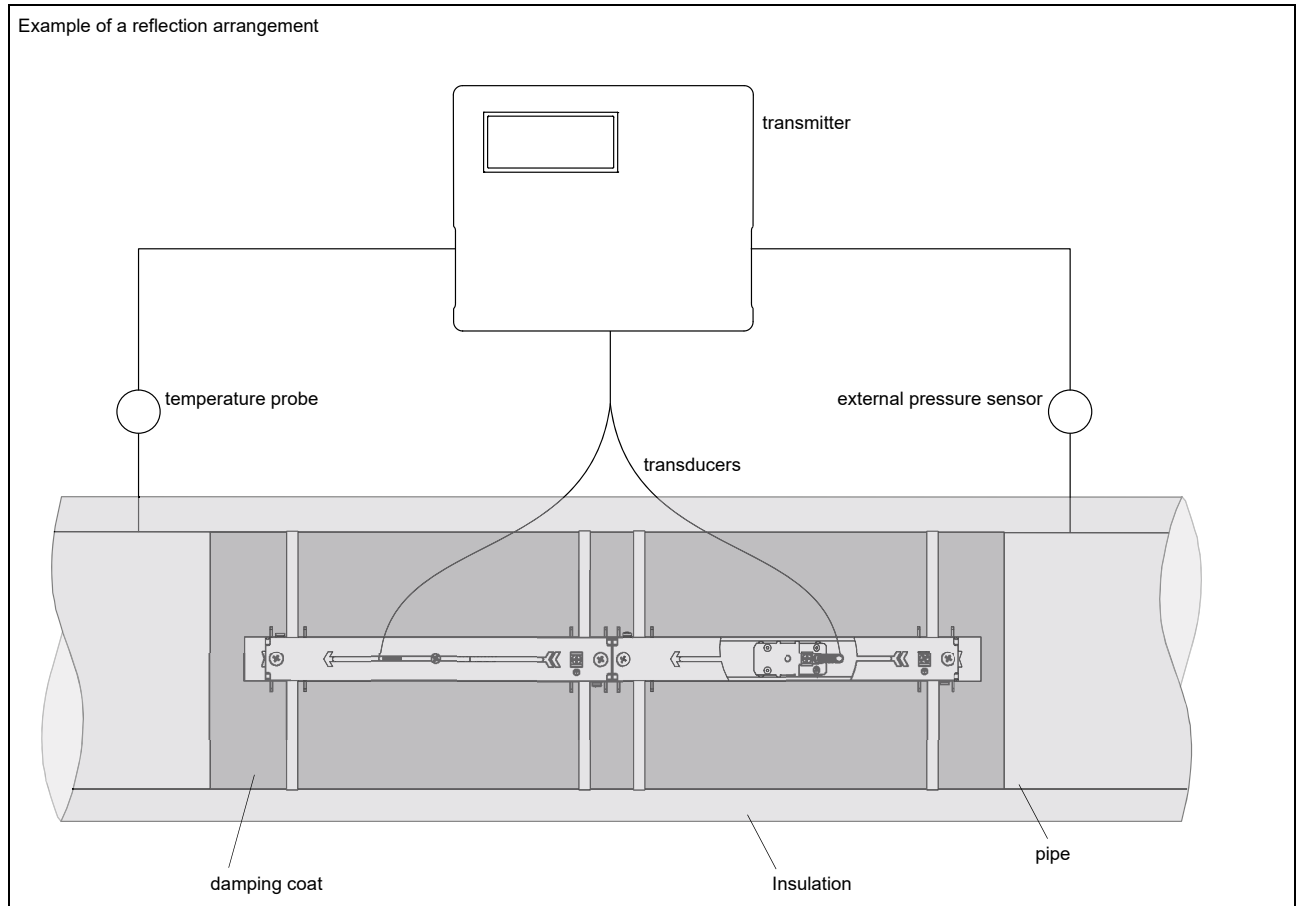Typical measurement setup



Transmitter

Technical data


	FLUXUS G721ST-NN0*A	FLUXUS G721ST-NN0*S
		
design	standard field device	field device with stainless steel housing
application	steam measurement	
measurement		
	in advance test measurement for validation of the application necessary	
measurement principle	transit time difference correlation principle	
flow velocity	m/s	depending on pipe diameter and transducer, see diagrams
repeatability		0.15 % of reading ± 0.005 m/s
fluid	saturated steam, superheated steam	
fluid pressure	bar (a)	3...10
fluid temperature	°C	135...180
temperature compensation	corresponding to the recommendations in ANSI/ASME MFC-5.1-2011	
measurement uncertainty (volumetric flow rate)		
measurement uncertainty at the measuring point	$\pm 1...3$ % of reading ± 0.005 m/s, depending on application	
transmitter		
power supply		<ul style="list-style-type: none"> • 100...230 V/50...60 Hz or • 20...32 V DC or • 11...16 V DC
power consumption	W	< 15
number of measuring channels		1, optional: 2
damping	s	0...100 (adjustable)
measuring cycle	Hz	100...1000 (1 channel)
response time	s	1 (1 channel), option: 0.02
housing material		aluminum, powder coated stainless steel 316L (1.4404)
degree of protection		IP66
dimensions	mm	see dimensional drawing
weight	kg	5.4 5.1
fixation		wall mounting, optional: 2" pipe mounting
ambient temperature	°C	-40...+60 (< -20 °C without operation of the display)
display		128 x 64 dots, backlight
menu language		English, German, French, Spanish, Dutch, Russian, Polish, Turkish, Italian
measuring functions		
physical quantities	operating volumetric flow rate, mass flow rate, flow velocity	
totalizer	volume, mass	
calculation functions	average, difference, sum (2 measuring channels necessary)	
diagnostic functions	sound speed, signal amplitude, SNR, SCNR, standard deviation of amplitudes and transit times	
communication interfaces		
service interfaces	measured value transmission, parametrization of the transmitter: <ul style="list-style-type: none"> • USB • LAN 	
process interfaces	max. 1 option: <ul style="list-style-type: none"> • RS485 (ASCII sender) • Modbus RTU¹ • BACnet MS/TP • Profibus PA¹ • FF H1¹ • Modbus TCP¹ • BACnet IP 	
accessories		
serial data kit	USB cable	
software	<ul style="list-style-type: none"> • FluxDiagReader: download of measured values and parameters, graphical presentation • FluxDiag (optional): download of measurement data, graphical presentation, report generation, parametrization of the transmitter 	
data logger		
loggable values	all physical quantities, totalized values and diagnostic values	
capacity	max. 800 000 measured values	

¹ with inputs and including parametrization of the transmitter

		FLUXUS G721ST-NN0*A	FLUXUS G721ST-NN0*S
outputs			
The outputs are galvanically isolated from the transmitter.			
• switchable current output			
The switchable current outputs are menu selectable all together as passive or active.			
number		2 (1 measuring channel), optional: 4 (2 measuring channels)	
range	mA	4...20 (3.2...22)	
accuracy		0.04 % of reading $\pm 3 \mu\text{A}$	
active output		$R_{\text{ext}} < 350 \Omega$	
passive output		$U_{\text{ext}} = 8...30 \text{ V}$, depending on R_{ext} ($R_{\text{ext}} < 1 \text{ k}\Omega$ at 30 V)	
• binary output			
number		3	
optorelay		26 V/100 mA	
binary output as alarm output			
• functions		limit, change of flow direction or error	
binary output as pulse output			
• functions		mainly for totalizing	
• pulse value	units	0.01...1000	
• pulse width	ms	optorelay: 1...1000	
inputs			
The inputs are galvanically isolated from the transmitter.			
• temperature input			
number		1 (1 measuring channel), optional: 2 (2 measuring channels)	
type		Pt100/Pt1000	
connection		4-wire	
range	$^{\circ}\text{C}$	-150...+560	
resolution	K	0.01	
accuracy		± 0.01 % of reading $\pm 0.03 \text{ K}$	
• current input			
number		1 (1 measuring channel), optional: 2 (2 measuring channels)	
accuracy		0.1 % of reading $\pm 10 \mu\text{A}$	
active input		$U_{\text{int}} = 24 \text{ V}$, $R_{\text{int}} = 50 \Omega$, $P_{\text{int}} < 0.5 \text{ W}$, not short-circuit proof	
• range	mA	0...20	
passive input		$R_{\text{int}} = 50 \Omega$, $P_{\text{int}} < 0.3 \text{ W}$	
• range	mA	-20...+20	


¹ with inputs and including parametrization of the transmitter

Saturated steam pressure curve

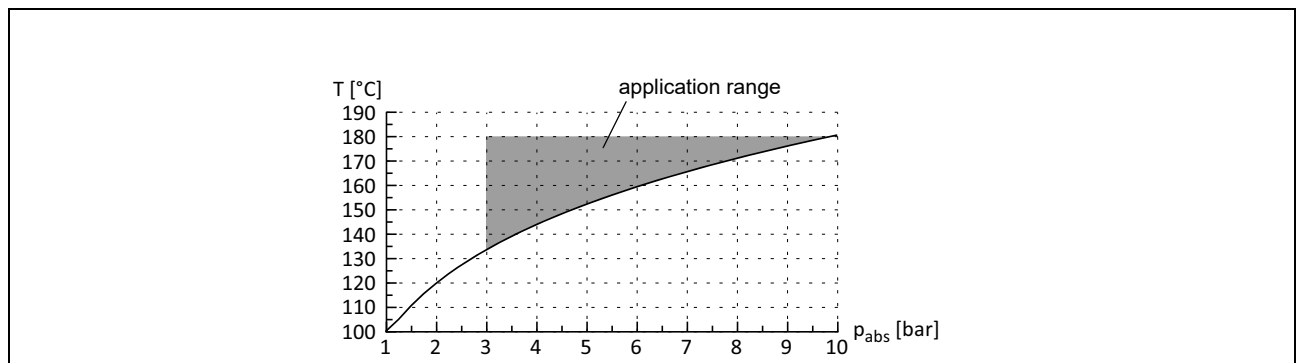


Dimensions

*721**_****A

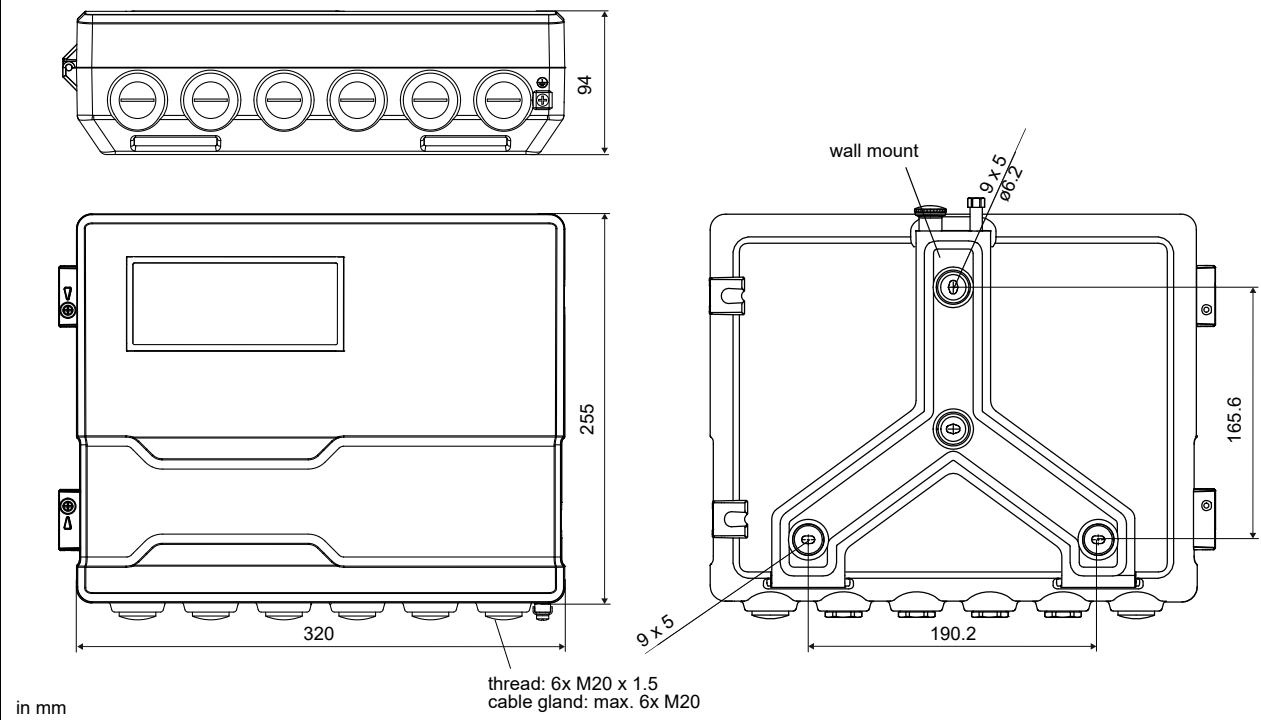

in mm


*721**_****S

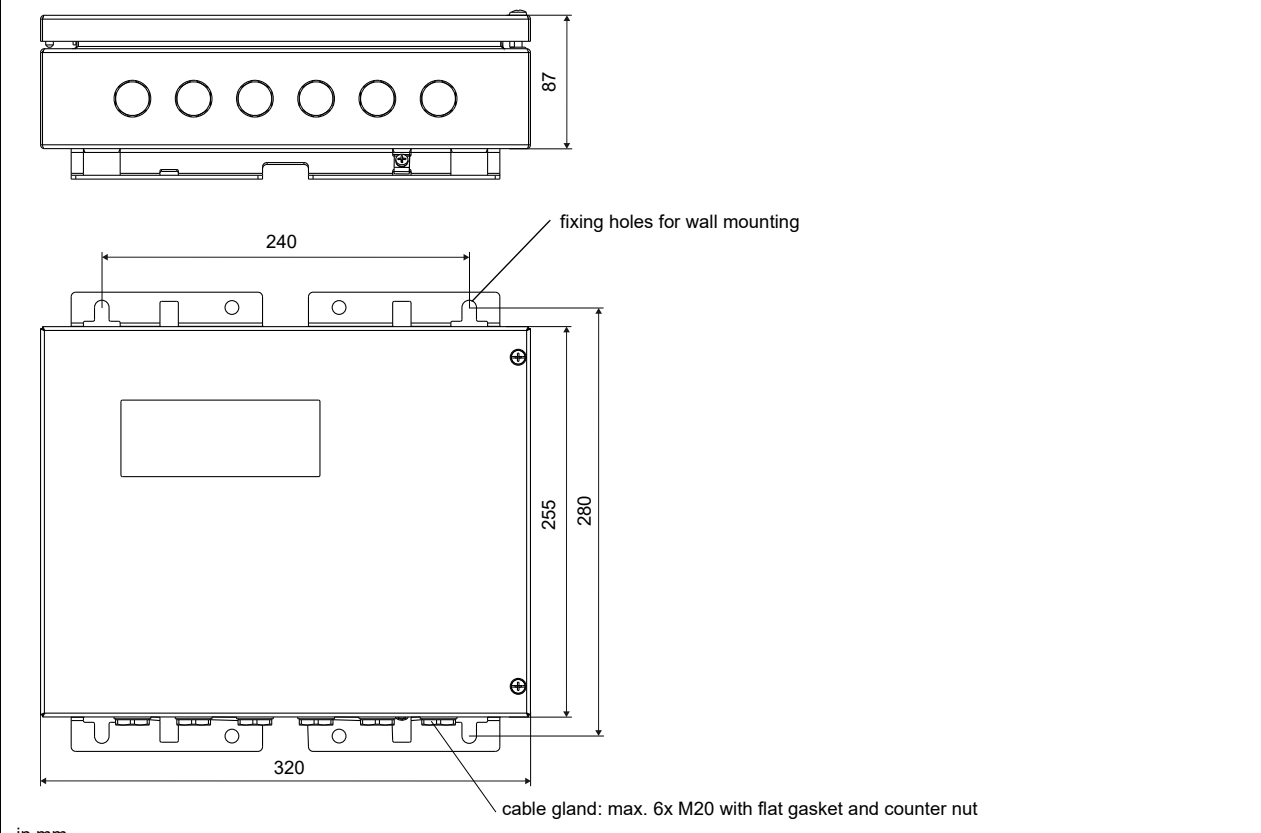


in mm

2" pipe mounting kit


*721**_****A

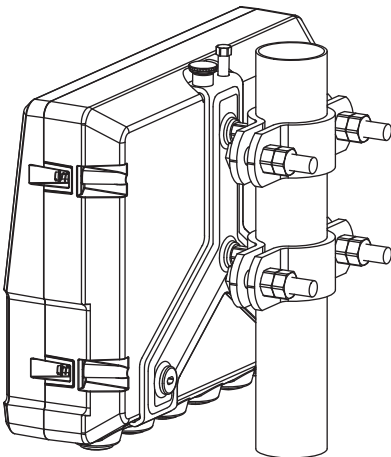

*721**_****S

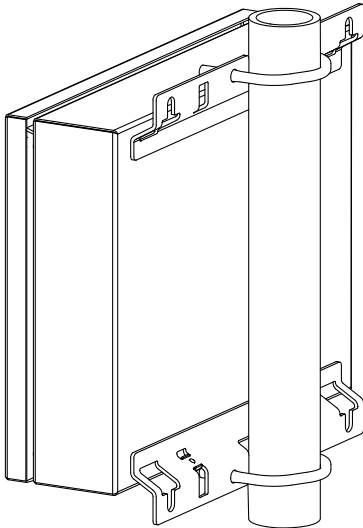

Terminal assignment

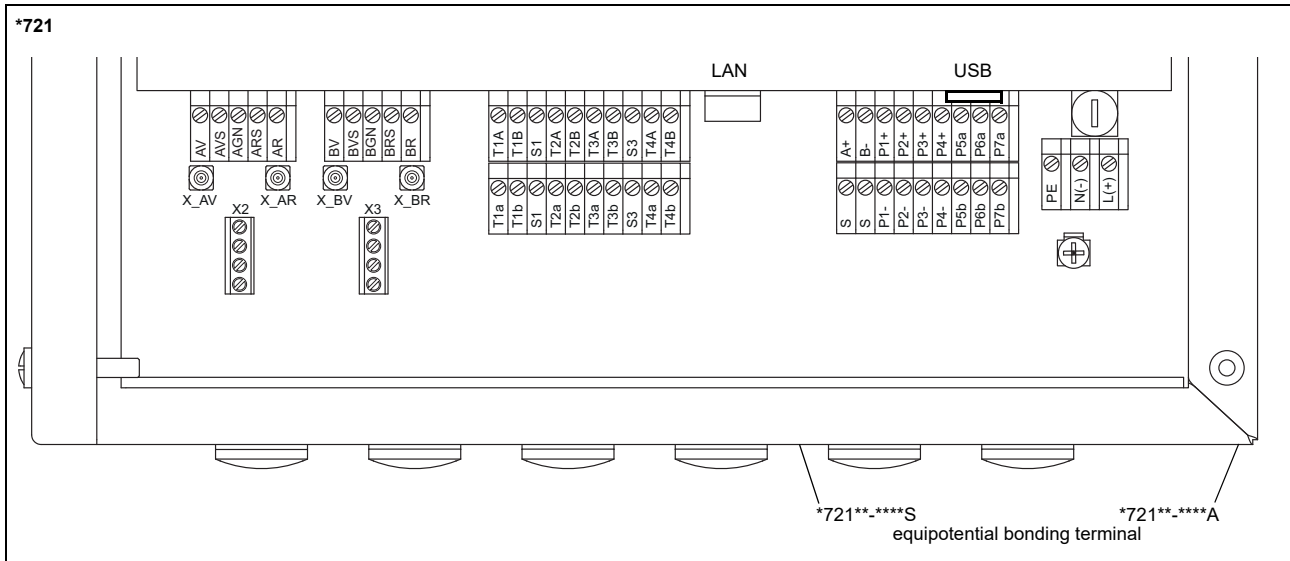

power supply ¹							
terminal		connection (AC)			connection (DC)		
PE		earth			earth		
N(-)		neutral			-		
L(+)		phase			+		
transducers							
extension cable				transducer cable			
measuring channel A				measuring channel B			
terminal	connection	terminal	connection	transducer	terminal	terminal	connection
AV	signal	BV	signal	↑	X_AV	X_BV	SMB connector
AVS	shield	BVS	shield				
ARS	shield	BRS	shield	↗	X_AR	X_BR	SMB connector
AR	signal	BR	signal				
outputs ¹							
terminal	connection	terminal	connection	communication interface			
P1+...P4+ P1-...P4-	current output	A+	signal +	<ul style="list-style-type: none"> • RS485¹ • Modbus RTU¹ • BACnet MS/TP¹ • Profibus PA¹ • FF H¹ 			
		B-	signal -				
P5a...P7a P5b...P7b	binary output	101	shield				
		USB	type B	<ul style="list-style-type: none"> • service (FluxDiag/FluxDiagReader) • service (FluxDiag/FluxDiagReader) • BACnet IP • Modbus TCP 			
		LAN	RJ45				
analog inputs ¹							
terminal	temperature probe	passive sensor	active sensor				
	connection with extension cable	connection	connection				
T1a...T2a	red	not connected	not connected				
T1A...T2A	grey	-	+				
T1b...T2b	blue	+	not connected				
T1B...T2B	white	not connected	-				
S1, S3	shield	not connected	not connected				

¹ cable (by customer):
 - e.g. flexible leads, with insulated wire end ferrules, lead cross sectional area: 0.25...2.5 mm²
 - outer diameter of the cable (*721**-****S with ferrite nut): max. 7.6 mm


Transducers

Transducer selection

Step 1


pipe wall thickness

transducer order code

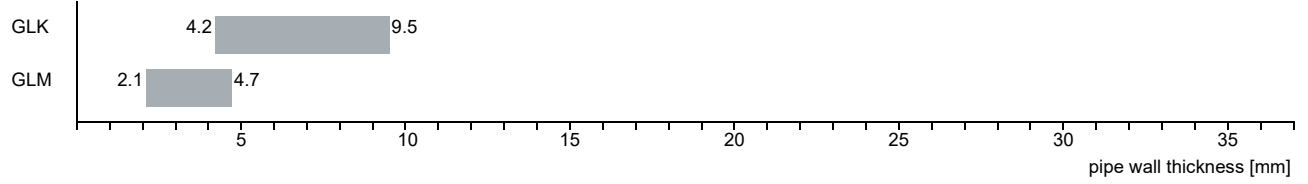

Step 2

inner pipe diameter d dependent on the flow velocity v of the fluid in the pipe

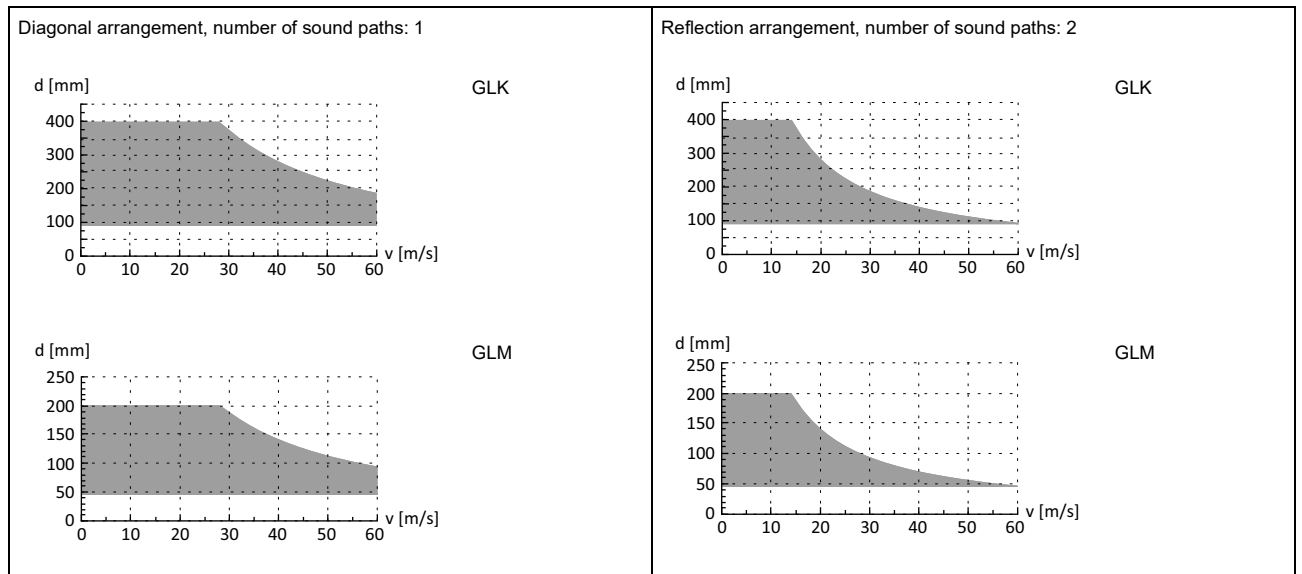

Technical data

order code		GLK-SNNTS/**	GLM-SNNTS/**
technical type		G(RT)K1S52	G(RT)M1S52
transducer frequency	MHz	0.5	1
inner pipe diameter d			
min.	mm	90	45
max.	mm	400	200
pipe wall thickness			
min.	mm	4.2	2.1
max.	mm	9.5	4.7
material			
housing		PPSU with stainless steel cap 316Ti (1.4571)	PPSU with stainless steel cap 316Ti (1.4571)
contact surface		PPSU	PPSU
degree of protection		IP65	IP65
transducer cable			
type		1699	1699
length	m	5	4
length (**-****/LC)	m	9	9
dimensions			
length l	mm	128.5	74
width b	mm	51	32
height h	mm	67.5	40.5
dimensional drawing			
weight (without cable)	kg	0.8	0.16
storing temperature			
min.	°C	-40	-40
max.	°C	+180	+180
operating temperature¹			
min.	°C	100	100
max.	°C	180	180
warm-up time	h	3	1
temperature compensation		x	x


¹ completely thermally insulated transducer installation necessary

Transducer mounting fixture

Order code

1, 2	3	4	5	6	7...9	no. of character
transducer mounting fixture	transducer	measurement arrangement	size	fixation	outer pipe diameter	option
VL						description
						Variofix L
	K					transducers with transducer frequency K
	M					transducers with transducer frequency M
		D				reflection arrangement or diagonal arrangement
		R				reflection arrangement
			S			small
				B		bolts
				S		tension straps
				W		welding
					T36	40...360 mm
					013	10...130 mm
					036	130...360 mm
					092	360...920 mm
						OS housing with stainless steel 316
						Z special design

Variofix L (VLK, VLM)

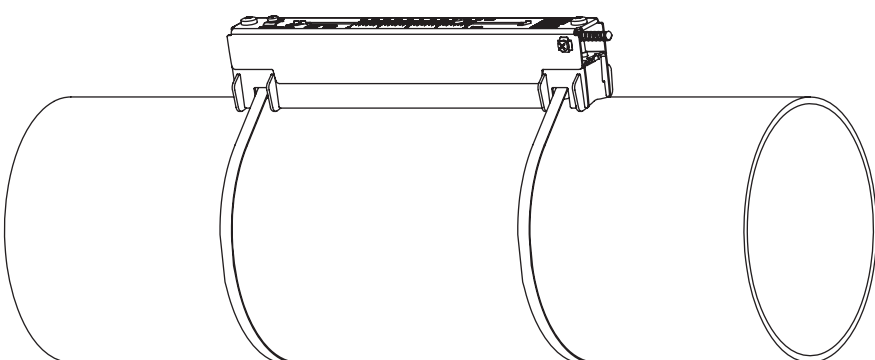

material: stainless steel 304 (1.4301), 301 (1.4310), 410 (1.4006)
 option OS: 316Ti (1.4571), 316L (1.4404), 17-7PH (1.4568)
 inner length:
VLK: 348 mm,
VLM: 234 mm
 dimensions:
VLK: 423 x 90 x 93 mm
VLM: 309 x 57 x 63 mm

Coupling materials for transducers


type	ambient temperature °C
coupling foil type VT ¹	-10...+200
coupling compound type E ²	-30...+200

¹ fluid temperature 200 °C: min. 2 years

² in combination with type VT only

Damping coat

The damping coat will be used to reduce acoustic noise influences on the measurement.

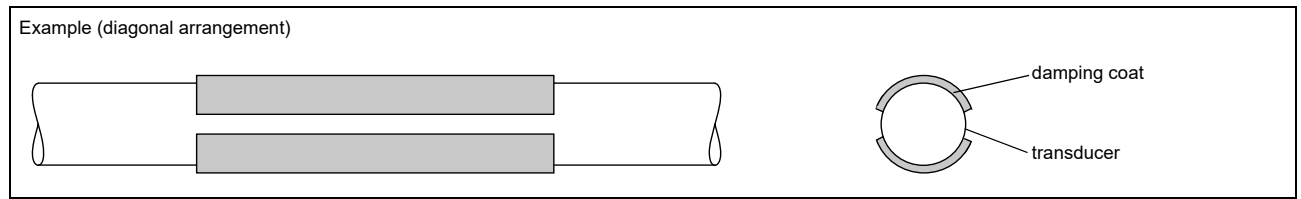


Technical data

order code		ACC-PE-GNNN-DPL1
material		multipolymeric matrix/inorganic ceramic coating
properties		heat resistant, inert
fluid temperature when applying	°C	10...200
drying time (example)		approx. 3 h at 20 °C approx. 15 min at 150 °C
temperature resistance in dry state	°C	max. 650
packing drum	l	1
durability of the packing drum (unopened)		2 years

Observe installation instructions (TI_DampingCoat).

Connection systems

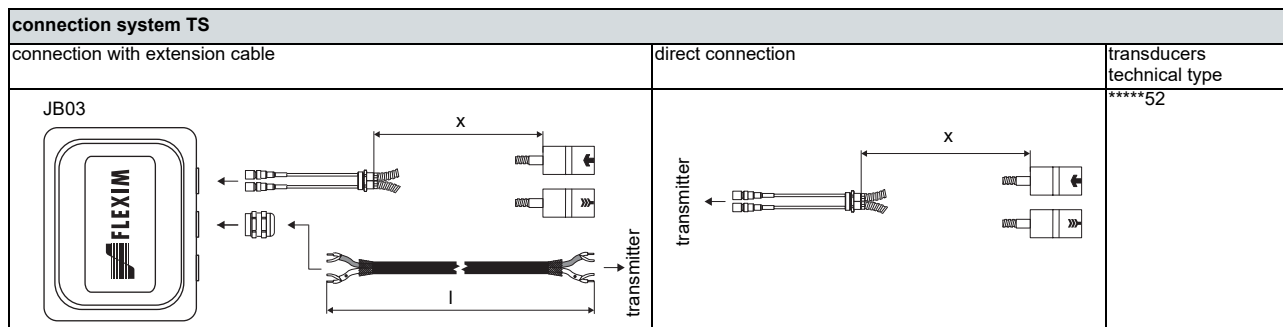

Cable

transducer cable	
type	1699
weight	kg/m 0.094
ambient temperature	°C -55...+200
cable jacket	
material	PTFE
outer diameter	mm 2.9
thickness	mm 0.3
colour	brown
shield	x
sheath	
material	stainless steel 316Ti (1.4571)
outer diameter	mm 8

extension cable			
type	2615	5245	
weight	kg/m 0.18	0.38	
ambient temperature	°C -30...+70	-30...+70	
properties	halogen free fire propagation test according to IEC 60332-1 combustion test according to IEC 60754-2	halogen free fire propagation test according to IEC 60332-1 combustion test according to IEC 60754-2	
cable jacket			
material	PUR	PUR	
outer diameter	mm max. 12	max. 12	
thickness	mm 2	2	
colour	black	black	
shield	x	x	
sheath			
material	-	steel wire braid with copolymer sheath	
outer diameter	mm -	max. 15.5	

Cable length




transducer frequency		G, H, K		M, P		Q	
transducers technical type		x	l	x	l	x	l
*R***5*	m	5	≤ 300	4	≤ 300	3	≤ 90
option LC: *L***5*	m	9	≤ 300	9	≤ 300	9	≤ 90

x - transducer cable length



l - max. length of extension cable (depending on application)

Junction box

Technical data

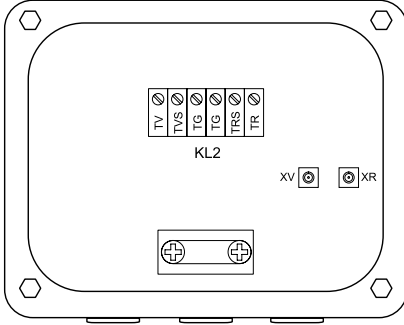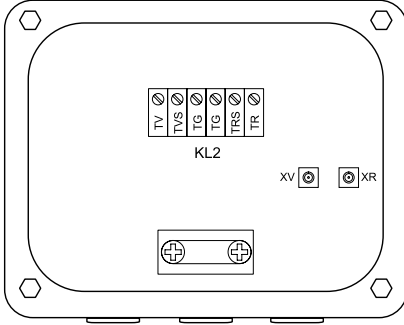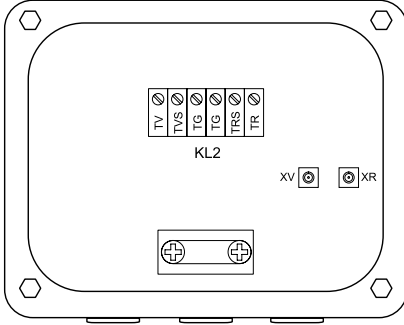
JB03																																															
weight	kg	1.2 kg																																													
fixation		wall mounting optional: 2" pipe mounting																																													
material																																															
housing		stainless steel 316L (1.4404)																																													
gasket		silicone																																													
degree of protection		IP67																																													
ambient temperature																																															
min.	°C	-40																																													
max.	°C	+80																																													
<table border="1"> <thead> <tr> <th colspan="4">Connection</th> </tr> </thead> <tbody> <tr> <td colspan="4" style="text-align: center;">  </td> </tr> <tr> <th colspan="4">Transducers</th> </tr> <tr> <th>terminal</th> <th>connection</th> <th colspan="2">transducer</th> </tr> <tr> <td>XV</td> <td>SMB connector</td> <td colspan="2">↑</td> </tr> <tr> <td>XR</td> <td>SMB connector</td> <td colspan="2">⤴</td> </tr> <tr> <th colspan="4">Extension cable</th> </tr> <tr> <th>terminal strip</th> <th>terminal</th> <th colspan="2">connection</th> </tr> <tr> <td rowspan="4">KL2</td> <td>TV</td> <td colspan="2">signal</td> </tr> <tr> <td>TVS</td> <td colspan="2">internal shield</td> </tr> <tr> <td>TRS</td> <td colspan="2">internal shield</td> </tr> <tr> <td>TR</td> <td colspan="2">signal</td> </tr> </tbody> </table>			Connection								Transducers				terminal	connection	transducer		XV	SMB connector	↑		XR	SMB connector	⤴		Extension cable				terminal strip	terminal	connection		KL2	TV	signal		TVS	internal shield		TRS	internal shield		TR	signal	
Connection																																															
																																															
Transducers																																															
terminal	connection	transducer																																													
XV	SMB connector	↑																																													
XR	SMB connector	⤴																																													
Extension cable																																															
terminal strip	terminal	connection																																													
KL2	TV	signal																																													
	TVS	internal shield																																													
	TRS	internal shield																																													
	TR	signal																																													

Dimensions

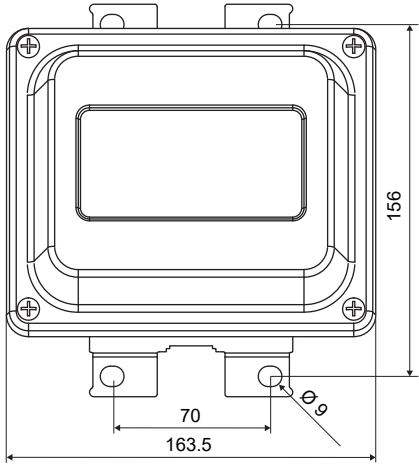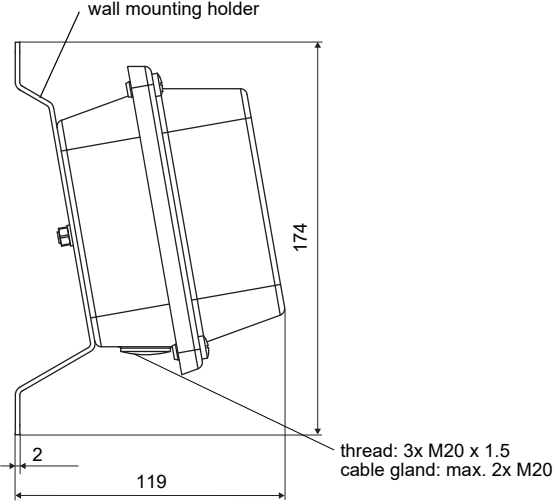JB0*, JBP*	
	
in mm	





2" pipe mounting kit

JB**




Clamp-on temperature probe (optional)


Technical data

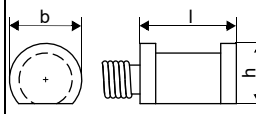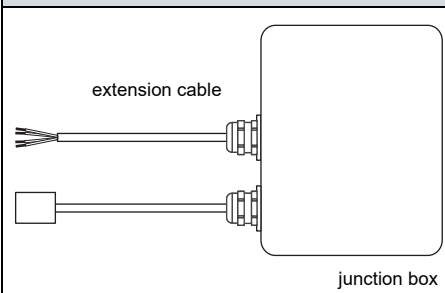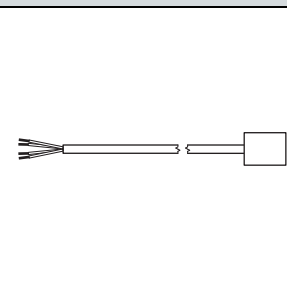PT12N, PT12N-LC			
order code	PT12N: ACC-PE-GNNN-/T109 ACC-PE-GNNN-/T106 (matched) PT12N-LC: ACC-PE-GNNN-/T113 ACC-PE-GNNN-/T112 (matched)		
design	clamp-on option: with long cable		
type	Pt100		
connection	4-wire		
measuring range	°C -30...+250		
accuracy T	$\pm(0.15 \text{ °C} + 2 \cdot 10^{-3} \cdot T \text{ [°C]})$ class A		
accuracy ΔT (2x Pt matched according to EN 1434-1)	$\leq 0.1 \text{ K}$ ($3 \text{ K} < \Delta T < 6 \text{ K}$), more corresponding to EN 1434-1		
response time	s 50		
housing	aluminum		
degree of protection	IP66		
dimensions			
length l	mm 20		
width b	mm 15		
height h	mm 13		
dimensional drawing			
weight	kg 0.25		
accessories			
thermal conductivity foil 250 °C	x		
Connection system			
connection with extension cable	direct connection		
			
Connection			
	temperature probe		
	red		
	red/blue		
	white/blue		
	white		
Cable			
	PT12N	PT12N-LC	extension cable
type	4 x 0.25 mm ² black		LIYCY 8 x 0.14 mm ² grey
standard length	m 3	15	5/10/25
max. length	m -		200
cable jacket	PTFE		PVC


Fixation
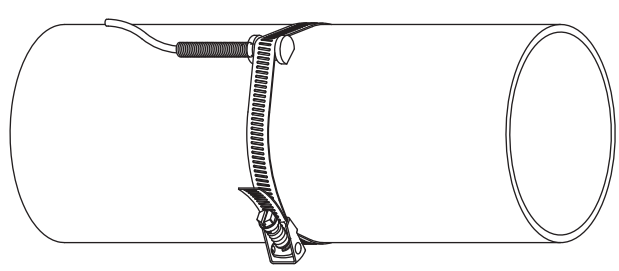
<p>tension strap PT12N</p> 	<p>material: stainless steel 301 (1.4310), 410 (1.4006) thermal insulation necessary</p>
---	--


Junction box

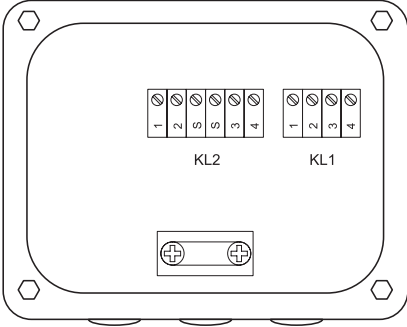JBT3		
order code		ACC-PE-GNNN-/JB6
weight	kg	1.2 kg
fixation		wall mounting optional: 2" pipe mounting
material		
housing		stainless steel 316L (1.4404)
gasket		silicone
degree of protection		IP67
ambient temperature		
min.	°C	-40
max.	°C	+80
Connection		
		
Temperature probe		
terminal strip	terminal	connection
KL1	1	red
	2	red/blue
	3	white
	4	white/blue
Extension cable		
terminal strip	terminal	connection
KL2	1	red
	2	grey
	3	white
	4	blue

Dimensions

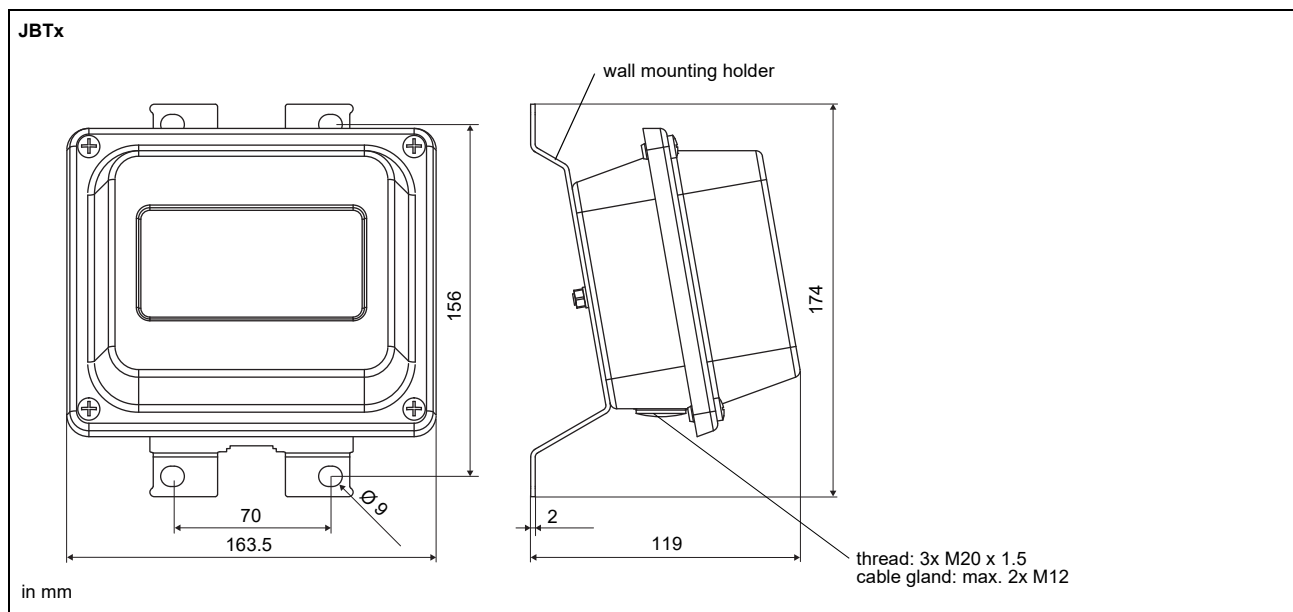

2" pipe mounting kit

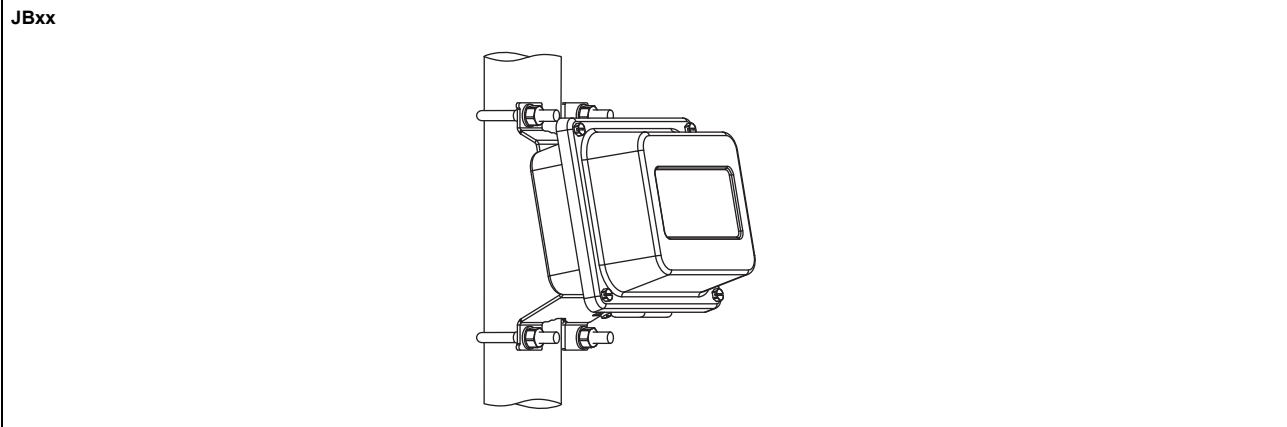

FLEXIM GmbH
Boxberger Str. 4
12681 Berlin
Germany
Tel.: +49 (30) 93 66 76 60
Fax: +49 (30) 93 66 76 80
internet: www.flexim.com
e-mail: info@flexim.com

Subject to change without notification.
Errors excepted.
FLUXUS is a registered trademark of FLEXIM GmbH.
Copyright (©) FLEXIM GmbH 2019