





FEATURES

- Low service costs
- Long life
- Perfect for storage of rubber and steel for testing
- Digital controller with potential free contact (which makes it possible to connect it to an external alarm)
- Accessories including baskets - see page 64

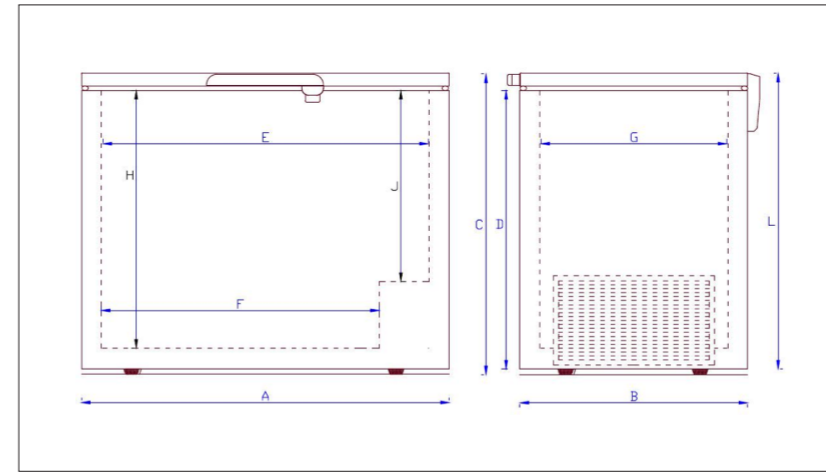

PRO

LOW TEMPERATURE FOR INDUSTRIAL RESEARCH

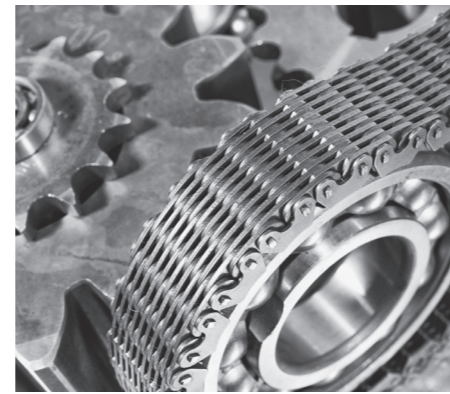

DIGITAL CONTROLLER



| | PRO 11 | PRO 21 | PRO 31 | PRO 41 | PRO 60 |
|--------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Ambient temperature range | +10 to +30 | +10 to +30 | +10 to +30 | +10 to +30 | +10 to +30 |
| Gross volume, litres | 130 | 226 | 300 | 360 | 481 |
| Net volume, litres | 130 | 226 | 300 | 360 | 481 |
| Temperature range inside unit | -30 to -60 | -30 to -60 | -30 to -60 | -30 to -60 | -30 to -60 |
| Refrigerant: Mix of 2 Hydro carbons | Yes | Yes | Yes | Yes | Yes |
| Energy consumption / 24 h kwh | 4,3 | 5 | 5,2 | 6,1 | 9,2 |
| Input power (watt) | 375 | 455 | 544 | 587 | 612 |
| DIMENSIONS | | | | | |
| External dimensions (WxDxH) | 725*655*865 | 1055*655*865 | 1305*655*865 | 1505*655*865 | 1705*655*865 |
| Internal dimensions (WxDxH) | 520*450*650 | 850*450*650 | 1100*450*650 | 1300*450*650 | 1540*490*670 |
| Dimension A | 725 | 1055 | 1305 | 1505 | 1705 |
| Dimension B | 655 | 655 | 655 | 655 | 655 |
| Dimension C | 865 | 865 | 865 | 865 | 865 |
| Dimension D | 780 | 780 | 780 | 780 | 780 |
| Dimension E | 520 | 850 | 1100 | 1300 | 1540 |
| Dimension F | 320 | 650 | 900 | 1100 | 1340 |
| Dimension G | 450 | 450 | 450 | 450 | 490 |
| Dimension H | 650 | 650 | 650 | 650 | 670 |
| Dimension J | 400 | 400 | 400 | 400 | 420 |
| Dimension L | 850 | 850 | 850 | 850 | 850 |
| Insulation (mm) | 100 | 100 | 100 | 100 | 80 |
| ACCESSORIES | | | | | |
| Dividers | Optional | Optional | Optional | Optional | Optional |
| Max. number of baskets (option) | 2 | 3 | 4 | 5 | n/a |
| Castors w. brakes | Incl. | Incl. | Incl. | Incl. | Incl. |
| Lock | Incl. | Incl. | Incl. | Incl. | Incl. |
| Digital controller w. acoustic alarm | Incl. | Incl. | Incl. | Incl. | Incl. |
| OTHER DATA | | | | | |
| Outer cabinet | White | White | White | White | White |
| Inner cabinet | Steel inner liner | Steel inner liner | Steel inner liner | Steel inner liner | Steel inner liner |
| Type of cooling | Static | Static | Static | Static | Static |
| Type of defrost | Manual | Manual | Manual | Manual | Manual |
| Power | 220V/50Hz | 220V/50Hz | 220V/50Hz | 220V/50Hz | 220V/50Hz |
| Power 110volt / 60 hz | Optional | Optional | Optional | Optional | Optional |
| Thermostat | Digital | Digital | Digital | Digital | Digital |
| Net weight, kg | 56 | 67 | 80 | 89 | 95 |
| Gross weight, kg | 63 | 74 | 88 | 97 | 104 |
| SHIPPING | | | | | |
| 20' cont. Capacity | 42 | 30 | 24 | 20 | 18 |
| 40' cont. Capacity | 90 | 64 | 50 | 44 | 38 |
| Standard Trailer capacity | 102 | 72 | 56 | 50 | 44 |