

GAS EXTRACTION MANAGER

PROFESSIONAL LANDFILL GAS MANAGEMENT WITH INTELLIGENT MODULAR DESIGN

Geotech GEM instruments are designed to stay in the field and on the job longer. Featuring QED's unique intelligent modular architecture, GEM users can replace or add gas modules in the field. A high-definition touch screen display makes user interface easier, reducing fatigue and potential errors.

FEATURES

- Pre-calibrated Modular design
- 1-3 gases configured
- Records static, differential and system pressures
- Calculates gas flow and heat value
- Hydrogen compensated CO measurement
- Field replaceable battery pack
- Utilises GAMSsoft software
- Zone 1 hazardous area certification
- 3-year warranty

BENEFITS

- No requirement for back-to-base service to replace modules
- Modules have individual calibration certificates
- Configuration and functional flexibility
- Accurate balancing of gas field with maximised LFG output from site
- Real time gas field adjustments
- Effective borehole management
- Up to 10 hours of field operation between battery charges
- Compliance and monitoring data and over the air firmware updates
- Module Care Packs available for easy maintenance



WiFi, Bluetooth and GPS

High Definition IPS Touchscreen

Hot Swappable Battery Pack

Four Gas Connection Ports with Serviceable Filters

Fast Navigation buttons

Large, Positive Click Hard Keys



TECHNICAL SPECIFICATIONS

POWER SUPPLY						
Battery Type	Rechargeable nickel metal hydride battery pack (user replaceable in Zone 1 hazardous areas)					
Battery Life	Typical use 8-10 hours from full charge					
Battery Charger	Battery charger powered from mains supply (100-240V), Battery packs can be charged separately from the instrument					
Charge Time	Approximately 3 hours from complete discharge to full charge					
GAS RANGES						
Gases measured	Gas	Sensor	Range	Typical Accuracy*	Resolution	T90
	CH4	NDIR	0- 100%	± 0.5% (0-70%) Volume	0.1%	≤ 10 seconds
				± 1.5% (70-100%) Volume		
	CH4 & CO2	Dual NDIR	0- 100%	± 0.5% (0-70%) Volume	0.1%	≤ 10 seconds
				± 1.5% (70-100%) Volume		
		0- 100%	± 0.5% (0-60%) Volume	0.1%	≤ 20 seconds	
			± 1.5% (60-100%) Volume			
	O2	Electrochemical Cell	0- 21%	± 0.3% Volume	0.1%	≤ 20 seconds
	H2S		0- 50 ppm	± 1.5% range	0.1 ppm	≤ 30 seconds
	H2S		0- 200 ppm	± 2.0% range	1 ppm	
	H2S		0- 500 ppm	± 2.0% range	1 ppm	
	H2S		0- 1,000 ppm	± 2.0% range	1 ppm	
	H2S		0- 5,000 ppm	± 2.0% range	1 ppm	
	H2S		0- 10,000 ppm	± 5.0% range	2 ppm	
	H2S		0- 40,000 ppm	± 5.0% range	5 ppm	
	CO		0- 500 ppm	± 2.0% range	1 ppm	
	CO		0- 1,000 ppm	± 2.0% range	1 ppm	
	CO		0- 2,000 ppm	± 2.0% range	1 ppm	
	CO(H2)**		0- 2,000 ppm	± 1.0% range	1 ppm	
H2	0- 1,000 ppm		± 2.5% range	1 ppm	≤ 90 seconds	
NH3	0- 1,000 ppm		± 10.0% range	1 ppm		
*Typical Accuracy	All accuracies quoted are after calibration plus accuracy of calibration gas used					
**Hydrogen compensated carbon monoxide	Hydrogen cross gas effect on carbon monoxide approximately 1% Do not use where hydrogen is in excess of 10,000ppm					

Data Sheet Reference : DS077 Issue 02

QED Environmental Systems Inc.
2355 Bishop Circle West Dexter, MI 48130, USA

info@qedenv.com


800.624.2026
734.995.2547

TECHNICAL SPECIFICATIONS CONTINUED

PUMP	
Flow	550ml/min typically
Flow Fail Point	-100 to -375 mbar vacuum- user settable
Maximum Vacuum Restart	-375 mbar approximately with flow rate of approx 200 ml/min
FACILITIES	
Temperature measurement / accuracy *	-10°C to +100°C (14°F to 165°F) with optional probe / ±0.5°C (1°F)
Flow (anemometer) accuracy *	0.7 to 40 m/s / ±1.0% full scale plus ±3.0% reading
Communications	WiFi or Bluetooth to GAMSoft and Affinity
Relative pressure measurement / accuracy	±500 mbar / ±4 mbar to ±15 mbar max (should be zeroed before reading)
Barometric pressure measurement / accuracy	500 to 1500 mbar / ±5 mbar accuracy
Memory	2,000 IDs, 4000 readings
ENVIRONMENT CONDITIONS	
Ambient Range	700 to 1200 mbar / -10° C to +45° C (15° F to 120°F)
Relative Humidity	0-95% non-condensing
IP rating	IP65
PHYSICAL	
Case material	High impact ABS composite with rubber over-moulding 260 x 170 x 65mm / 1.9 kg
Display	HD 5" touchscreen LCD
Gas sample filters	Internal user changeable 2.0µm PTFE moisture and dust filter
AFFINITY WIRELESS COMMUNICATOR*	
Case Material	High impact ABS composite (124 x 74 x 30mm)
Ambient Range	-10°C to +50°C
Relative Humidity	0- 95% non-condensing
IP Rating	IP65
Communications	Bluetooth to i-Q Series
Compatible with	Temperature probe, Anemometer
Battery Type	Only use 2 x AA Type Energizer L91 batteries
Battery Life	Approx. 10 days, based on 8-hours per day
UKEX / ATEX / IECEx	Ex ib IIA T1 Gb (Ta = -10°C to +50°C)
North America	CLASS 1, ZONE 1, AEx ib IIA T1 (Ta = -10°C to +50°C)
CERTIFICATION RATING	
UKEX/ATEX / IECEx	Ex ib IIA T1 Gb (Ta = -10°C to +45°C)
SGS	CLASS 1, ZONE 1, AEx ib IIA T1 (Ta=-10°C to +45°C) (USA) CLASS 1, ZONE 1, Ex ib IIA T1 (Ta=-10°C to +45°C) (Canada)



Intelligent, factory calibrated and user replaceable modules for the measurement of gas or pressure

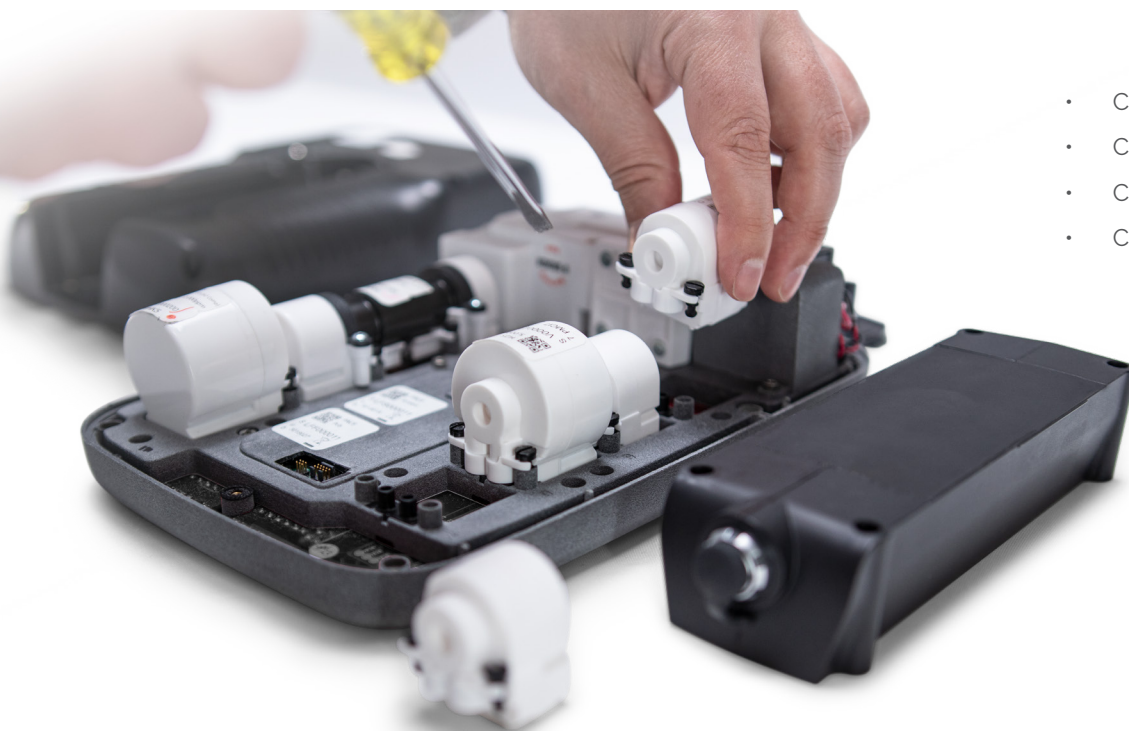

- Completely configurable
- Completely scalable
- Completely user-upgradeable
- Completely user-maintainable

GEM instruments with modular architecture give users complete control of instrument

- Gas cells are designed to be serviced by the customer, and fully supported with factory inventory
- Pre-calibrated replacement modules come from QED ready to be installed
- Replacement gas cells arrive with a certificate of calibration, maintaining compliance in between yearly inspection and service
- The GEM can be converted to any other configuration (up to three gases) in the field
- Affinity wireless communications module allows for Bluetooth connection between the GEM and temperature probe or anemometer
- Long battery life and field swappable battery capability means less interruption for recharging with optional spare battery pack



GAMSoft™ Control and Compliance Software

GAMSoft is a single software package which manages data collection and reporting

- Proprietary gas extraction management software
- Report generation for compliance
- Upload existing field data to new software to speed up adoption
- Interfaces with GEM via WIFI or Bluetooth for fast and secure data updates
- Secure data stream uploads to customer database and allows enterprise specific security protocols to be applied as required by users
- Over the air firmware updates support keeping the new GEM in the field where it belongs
- Manages instrument configuration



© Product designs and specifications are subject to change without notice. User is responsible for determining suitability of product.